


滾珠軸承(一)

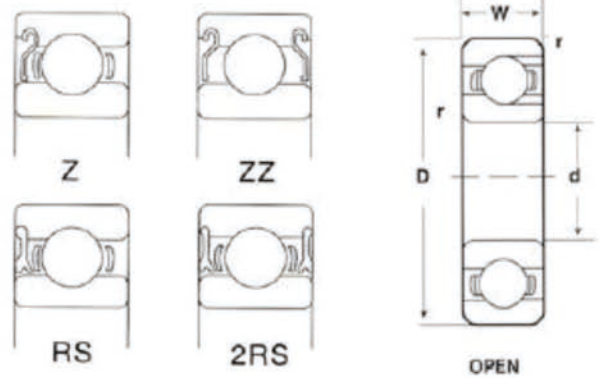

孔徑 Bore d	外徑 O.D D	寬度 Width B	倒角 Chamfe r min	軸承型號 BEARING NO..			額定負荷 Load Rating(kn)		極限轉速(轉/分) Maxrunout speed	
				開放型	封密型		動負荷 Cr	靜負荷 Cor	Grease r/min	Oil r/min
10	26	8	0.3	6000	6000ZZ	2RS	4.55	1.95	29000	34000
	30	9	0.6	6200	6200ZZ	2RS	5.1	2.39	25000	30000
	35	11	0.6	6300	6300ZZ	2RS	8.2	3.5	23000	27000
12	28	7	0.3	16001	-		5.1	2.4	26000	30000
	28	8	0.3	6001	6001ZZ	2RS	5.1	2.39	26000	30000
	32	10	0.6	6201	6201ZZ	2RS	6.1	2.75	22000	26000
15	37	12	1.0	6301	6301ZZ	2RS	9.7	4.2	20000	24000
	32	8	0.3	16002	-		5.6	2.8	22000	26000
	32	9	0.3	6002	6002ZZ	2RS	5.6	2.84	22000	26000
17	35	11	0.6	6202	6202ZZ	2RS	7.75	3.6	19000	23000
	42	13	1.0	6302	6302ZZ	2RS	11.4	5.45	17000	21000
	35	8	0.3	16003	-		6.8	3.35	20000	24000
20	35	10	0.3	6003	6003ZZ	2RS	6.8	3.35	20000	24000
	40	12	0.6	6203	6203ZZ	2RS	9.6	4.6	18000	21000
	47	14	1.0	6303	6303ZZ	2RS	13.5	6.55	16000	19000
25	42	8	0.3	16004	-		7.9	4.5	18000	21000
	42	12	0.6	6004	6004ZZ	2RS	9.4	5.05	18000	21000
	47	14	1.0	6204	6204ZZ	2RS	12.8	6.65	16000	18000
30	52	15	1.1	6304	6304ZZ	2RS	15.9	7.9	14000	17000
	47	8	0.3	16005	-		8.35	5.1	15000	18000
	47	12	0.6	6005	6005ZZ	2RS	10.1	5.85	15000	18000
30	52	15	1.0	6205	6205ZZ	2RS	14.0	7.85	13000	15000
	62	17	1.1	6305	6305ZZ	2RS	21.2	10.9	12000	14000
	55	9	0.3	16006	-		11.2	7.4	13000	15000
	55	13	1.0	6006	6006ZZ	2RS	13.2	8.3	13000	15000
30	62	16	1.0	6206	6206ZZ	2RS	19.5	11.3	11000	13000
	72	19	1.1	6306	6306ZZ	2RS	26.7	15.0	10000	12000