


滾珠軸承(二)

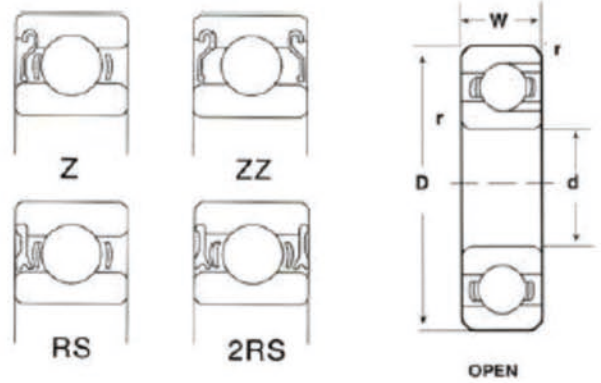

孔徑 Bore d	外徑 O.D D	寬度 Width B	倒角 Chamfe r min	軸承型號 BEARING NO..			額定負荷 Load Rating(kn)		極限轉速(轉/分) Maxrunout speed	
				開放型	封密型		動負荷 Cr	靜負荷 Cor	Grease r/min	Oil r/min
					6700	6700ZZ				
10	15	4	0.1	6700	6700ZZ	2RS	1.01	0.555	25000	42000
	19	5	0.3	6800	6800ZZ	2RS	1.84	0.925	36000	43000
	22	6	0.3	6900	6900ZZ	2RS	2.70	1.27	34000	40000
12	18	4	0.2	6701	6701ZZ	2RS	1.07	0.655	22000	38000
	21	5	0.3	6801	6801ZZ	2RS	1.90	1.04	32000	38000
	24	6	0.3	6901	6901ZZ	2RS	2.90	1.46	30000	36000
15	21	4	0.2	6702	6702ZZ	2RS	1.15	0.79	20000	34000
	24	5	0.3	6802	6802ZZ	2RS	2.08	1.26	28000	34000
	28	7	0.3	6902	6902ZZ	2RS	4.1	2.06	24000	30000
17	23	4	0.2	6703	6703ZZ	2RS	1.2	0.865	15000	31000
	26	5	0.3	6803	6803ZZ	2RS	2.81	1.72	24000	30000
	30	7	0.3	6903	6903ZZ	2RS	4.65	2.58	22000	28000
20	27	4	0.2	6704	6704ZZ	2RS	1.79	1.32	13000	28000
	32	7	0.3	6804	6804ZZ	2RS	4.0	2.47	19000	24000
	37	9	0.3	6904	6904ZZ	2RS	6.4	3.7	18000	22000
25	32	4	0.2	6705	6705ZZ	2RS	1.93	1.55	11000	23000
	37	7	0.3	6805	6805ZZ	2RS	4.3	2.95	17000	20000
	42	9	0.3	6905	6905ZZ	2RS	7.05	4.55	16000	19000
30	37	4	0.2	6706	6706ZZ	2RS	2.05	1.78	10000	20000
	42	7	0.3	6806	6806ZZ	2RS	4.7	3.65	15000	18000
	47	9	0.3	6906	6906ZZ	2RS	7.25	5.0	14000	17000
35	44	5	0.2	6707	6707ZZ	2RS	1.862	1.637	9500	17000
	47	7	0.3	6807	6807ZZ	2RS	4.75	3.90	13000	16000
	55	10	0.6	6907	6907ZZ	2RS	11.2	7.45	11000	14000
40	50	6	0.3	6708	6708ZZ	2RS	2.519	2.234	8500	15000
	52	7	0.3	6808	6808ZZ	2RS	4.9	4.35	11000	14000
	62	12	0.6	6908	6908ZZ	2RS	13.9	9.9	10000	13000